



Binance Smart Chain Wallet Guide. How to create BSC wallet?

How to create a BSC BNB wallet in METAMASK for PC:

- Download Metamask from this link : metamask.io
- Register a wallet (Be sure to save 12 phrases during registration, write them down on a piece of paper and put them in a safe place, if you lose phrases, your wallet will no longer be restored);
- Click on the network window:

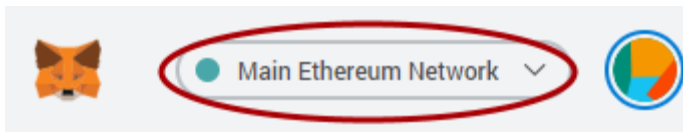

- **Select Custom RPC from the list:**

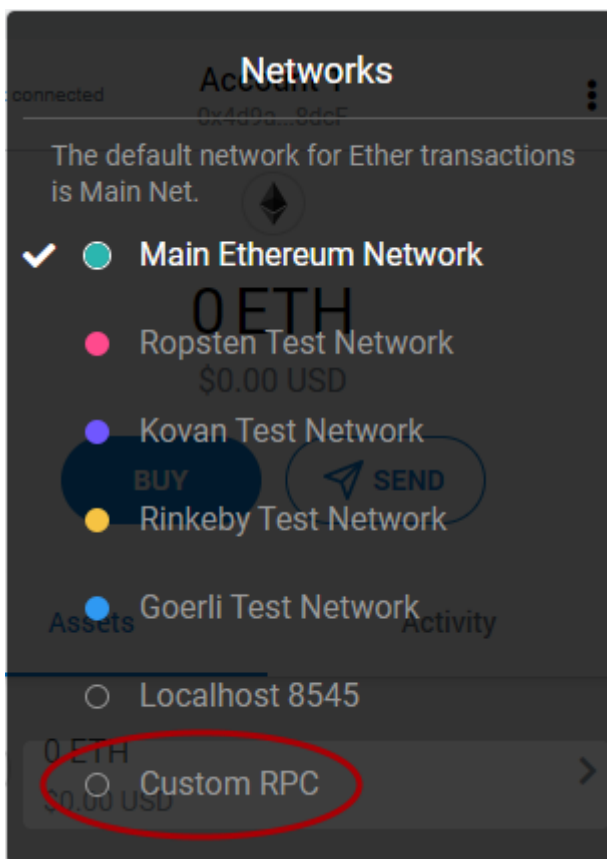

- Next, fill in this information:

Network name: Binance Smart Chain


New RPC URL: <https://bsc-dataseed.binance.org/>

Chain ID: 56

Symbol: BNB

Block explorer URL: <https://bscscan.com>

- It should look like this:

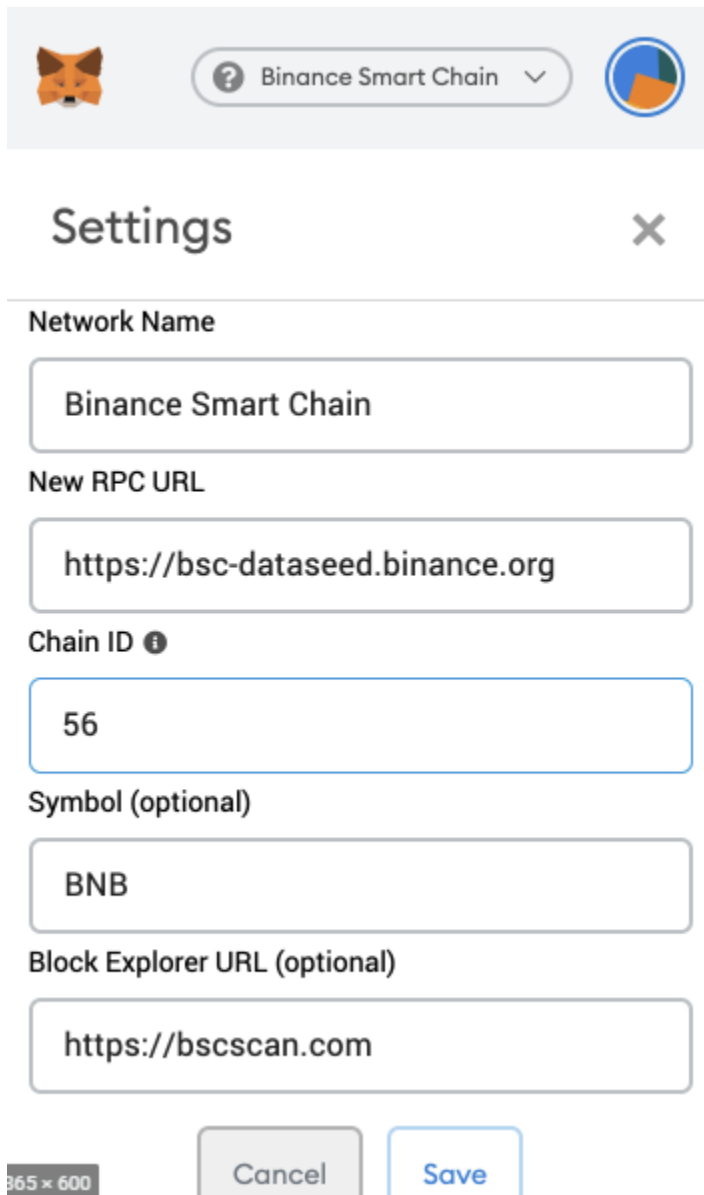

365 × 600

Settings

Network Name

Binance Smart Chain

New RPC URL

<https://bsc-dataseed.binance.org>

Chain ID ⓘ

56

Symbol (optional)


BNB

Block Explorer URL (optional)

<https://bscscan.com>

Cancel Save

- Click **Save** and your wallet is ready to go:

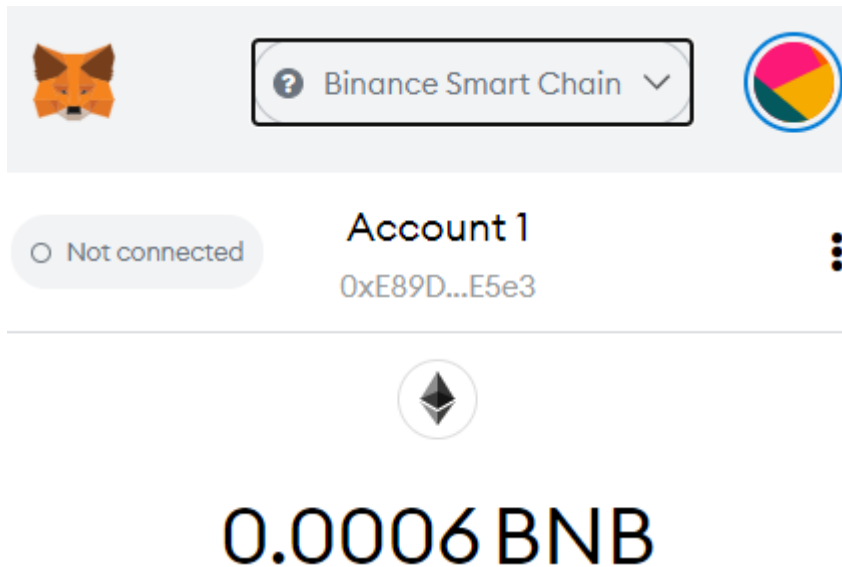


IMPORTANT: If you want to use Smart Chain in Metamask on your phone, you will also need to configure this network there

How to create a BSC BNB wallet in METAMASK for a smartphone:

- Download Metamask from the link: metamask.io/download (Choose the OS of your device, iOS or Android);
- Register a wallet (Be sure to save 12 phrases during registration, write them down on a piece of paper and put them in a safe place, if you lose phrases, your wallet will no longer be restored);
- Click on the side menu:



- Select Settings

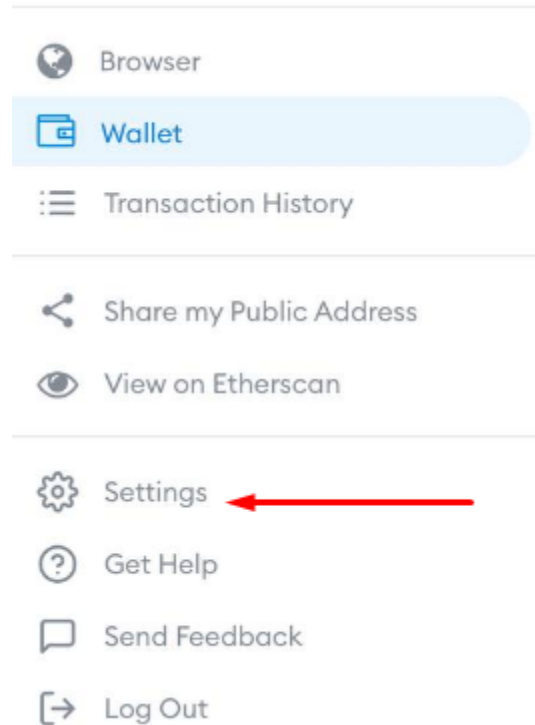

Close

Settings

General

Currency conversion, primary currency, language and search engine

Security & Privacy

Privacy settings, MetaMetrics, private key and wallet seed phrase

Advanced

Access developer features, reset account, setup testnets, sync with extension, state logs, IPFS gateway and custom RPC

Contacts

Add, edit, remove, and manage your accounts

Networks

Add and edit custom RPC networks

Experimental

WalletConnect & more...

About MetaMask

- Click on **Networks**
- Then click on button **Add Network:**



Networks

● Ethereum Main Network

Other Networks

● Ropsten Test Network

● Kovan Test Network

● Rinkeby Test Network

● Goerli Test Network

Add Network

- Next, fill in this information:

Network name: Binance Smart Chain

New RPC URL: <https://bsc-dataseed1.binance.org/>

Chain ID: 56

Symbol: BNB

Block explorer URL: <https://bscscan.com>

It should look like this:

[←](#) Networks

New RPC Network

Use a custom RPC-capable network via URL instead of one of the provided networks.


Network Name

RPC Url

Chain ID

Symbol

Block Explorer URL

 **Add**

- Your wallet is ready to go: